


Item	Part #	Description	Qty.
1.	1705295	Motor Reversing Solenoid - 24 Volt	1
2.	1703896	Solenoid Cover	1
3.	1800783	Cap Screw - 1/4" x 1 1/2"	2
4.	1800699	Nylon Lock Nut - 1/4"	2
5.	1800430	Ring Terminal - 1/4" x 8 Ga.	4

STEP 1: Disconnect wires and remove existing solenoid from configuration. Replace with new 24 volt solenoid 1 as shown in wiring diagram.

STEP 2: Remove existing ring terminals from wires A, B, C and D. Leave existing ring terminal on wire E.

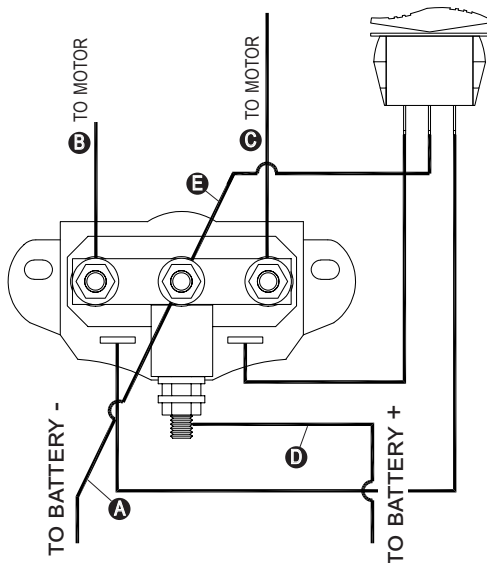

STEP 3: Install new ring terminals 5 on wires A, B, C and D.

STEP 4: Reconnect wires to 24 volt solenoid 1 as shown in wiring diagram.

