



Shur-Co® SMART2™

Wireless Control *Latching Module*

TS001FL - 0515

TECHNICAL SPECIFICATIONS

Module Specifications

Supply Voltage	11 - 16 Volts DC
Number of Outputs	2
Output Type	Latching
Output Connections	Output On: White output wire is connected to supply voltage. Output Off: White output wire is grounded.
Max Current	10 Amps Per Output
Control Switch on Module	Yes
Compatible Remote	SMART2™ Remote*
Automatic Safety Lockout (For <u>Remote Button</u> Switches)	None
Automatic Safety Lockout (For <u>Control Box</u> Switches)	Locked after 15-minutes of inactivity. While locked, outputs can not be turned on from control box. Latching output can be turned off while locked. Press and hold both box switches for 1-second to unlock. No lockout on box P/N 1122549.

*External box switches are used to pair SMART2™ remote to control box. Internal access is not required.

Available Applications

Work Lights*	Install up to four Shur-Co® LED work lights per output. (P/N 1122549)
Conveyors	While output remains on, module supplies 12V to customer-specified conveyor control solenoids. (P/N 1122550)
Tag Axle Control	Can supply a 12V continuous signal to operate customer specified electric-over-pneumatic solenoids. (P/N 1122550)
Pump Motor Control	Can supply a 12V continuous signal to customer-specified pump motors, or pump control solenoids. (P/N 1122550)

*No lockout on work lights (P/N 1122549).




Control Module Options

Module P/N	Decal Button Description
1122549	ON/OFF - ON/OFF (No Safety Lockout)*
1122550	ON/OFF - ON/OFF (Has Safety Lockout)


*Recommended for operating lights only.

Note: Switch labels on SMART2™ remote can be customized.




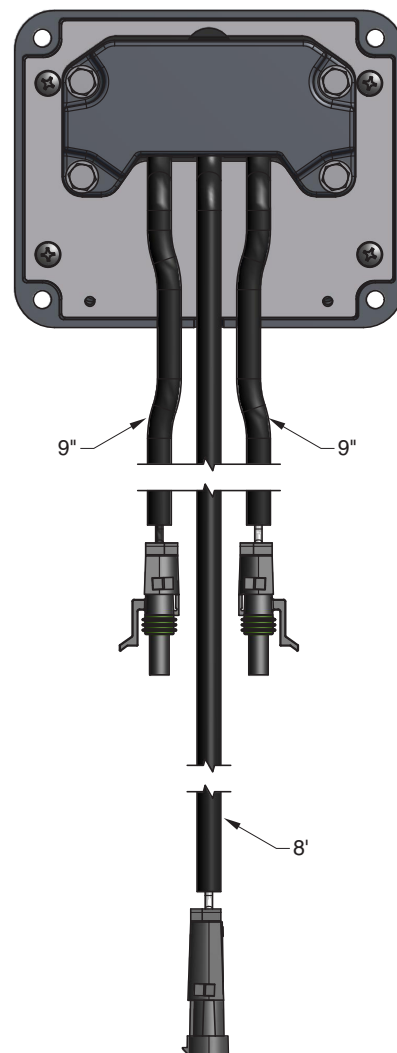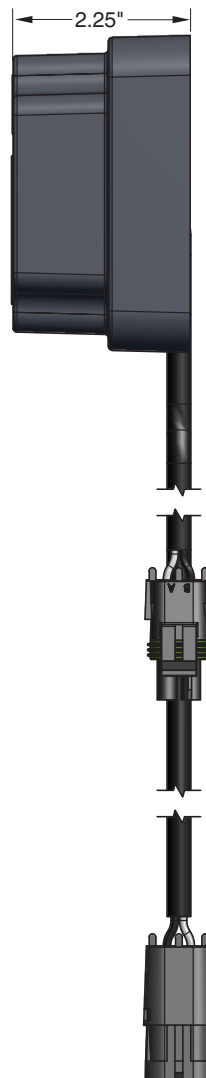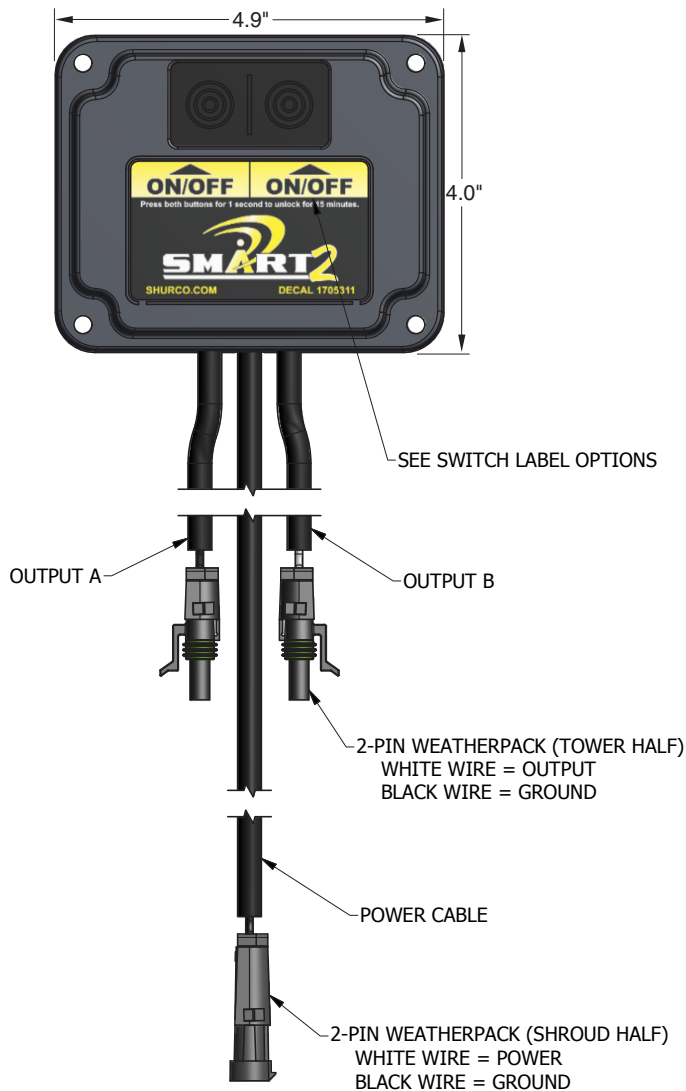

Mounting Options

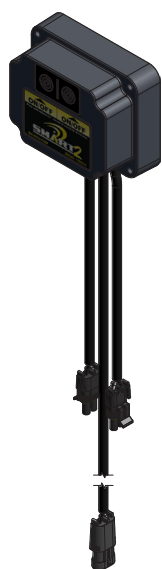


Wires mounted on outside of the skin.

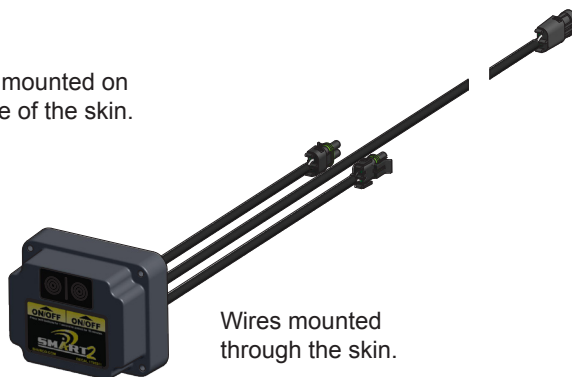

Wires mounted through the skin.

Not to Scale.

1122690 - SMARTWIRE POWER CABLE ADAPTER FOR MINI MODULES

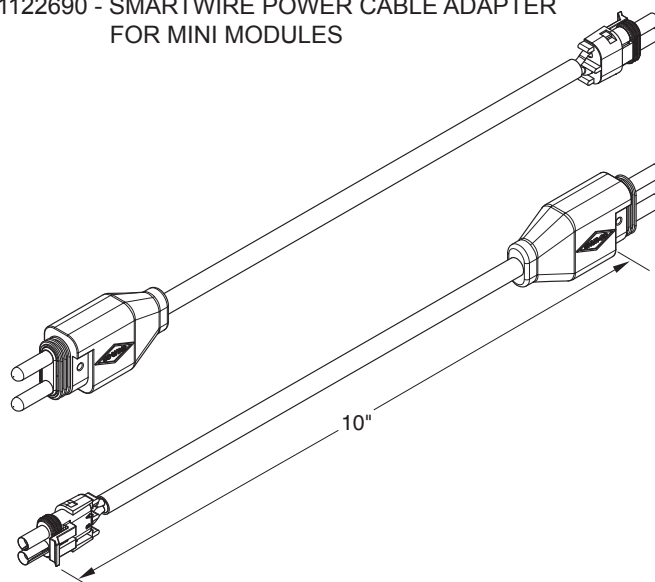

Not to Scale.