

SHUR-LOK® FOR GRAIN TRAILERS  
SHUR-LOK® FOR GRAIN TRAILERS  
**SHUR-LOK® FOR GRAIN TRAILERS**  
SHUR-LOK® FOR GRAIN TRAILERS



AGRICULTURE DIVISION



**GREATLY IMPROVES YOUR SAFETY OF OPERATION**

A005FL-0518

With proper tension, the tarp stays tight no matter how long the trailer. Standard crank is direct drive 1:1 and lets you roll the tarp while standing safely on the ground. An upgrade to electric is available with our 4500 Series HD, plus more SMARTrailer™ options like our ProTrap® and AutoTrap™.

Standard easy-off tarp stops enable fast, easy tarp removal. Upgrade from the standard-issue stretch cord return to a cable return with a non-stretch cable and heavy-duty internal tension spring-and-pulley. Our extended spline assembly allows crank arm and U-joint to slide forward, bypassing hinges and clearing rear doors. Ideal for open-top vans, Convertahoppers, belted floor trailers and “barn door” trailers. Uses deeper caps that, if aluminum, are a heavier alloy. All require a cap depth of 26 inches.

Shur-Co® offers a wide variety of tarp fabric choices, like DiamondCore™, a premium fabric that provides added substance, increased endurance and unparalleled abrasion resistance. Backed by a 24-month warranty and only available in black.

**Key Features:** Aluminum Latchplate, Easy-Off Tarp Stops, Galvanized Bows/Brackets, Aluminum End Caps, 1" or 2" Ridge Strap w/Ratchet, Stretch Cord Return, Standard Crank Arm w/80" Extension, Pinless Crank Retainer w/7" Standoff, 18-Oz. Vinyl Tarp.




*For more information, contact:*

[www.shurco.com](http://www.shurco.com)


# SHUR-LOK® BOX DETAILS For Grain Trailers

CORRECT PHYSICAL MEASUREMENTS ARE ESSENTIAL FOR PROPER TARP FIT. PROVIDE ALL REQUESTED INFORMATION OR YOUR ORDER MAY BE DELAYED. **DO NOT** USE UNIVERSAL BOX SIZES. **ALWAYS** USE ACTUAL MEASUREMENTS.

**FIGURE 1**

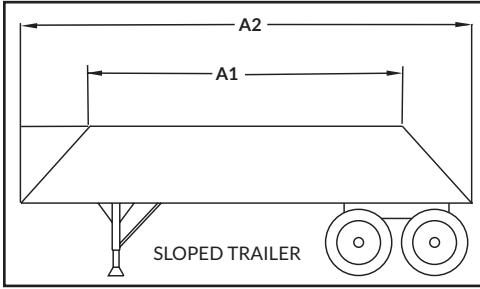

**FIGURE 2**

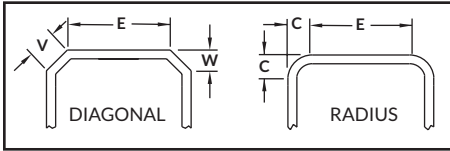

To measure radius corners correctly, place a carpenter's square on the front radius of the trailer. Measure at the point where the radius starts to arch around the front of the trailer.

## CONTACT INFORMATION

G03BD-0217

NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 EMAIL \_\_\_\_\_  
 CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_  
 PHONE \_\_\_\_\_ FAX \_\_\_\_\_  
 BOX/TRAILER MAKE \_\_\_\_\_

## BOX DIMENSIONS See Figure 1 for A1 and A2 measurements

A \_\_\_\_\_ UPPER BOX LENGTH  
 A1 \_\_\_\_\_ TAPERED UPPER LENGTH  
 A2 \_\_\_\_\_ TAPERED LOWER LENGTH  
 B \_\_\_\_\_ UPPER BOX WIDTH  
 Front \_\_\_\_\_ Center \_\_\_\_\_ Rear \_\_\_\_\_  
 N \_\_\_\_\_ TOP RAIL WIDTH  
 U \_\_\_\_\_ INSIDE BOX WIDTH  
 X \_\_\_\_\_ BOX HEIGHT

### CORNER CONFIGURATION See Figure 2

SQUARE     DIAGONAL     RADIUS

C \_\_\_\_\_ OUTSIDE CORNER RADIUS For all radius fronts  
 E \_\_\_\_\_ FLAT ACROSS FRONT  
 V \_\_\_\_\_ FLAT ACROSS DIAGONAL  
 W \_\_\_\_\_ DIAGONAL DEPTH

### TARP WEIGHT

18 OZ.     22 OZ.

TARP COLOR(S) \_\_\_\_\_

