



Shur-Co® SMART3™

Wireless Control *Momentary Module*

TS004FL - 1018

TECHNICAL SPECIFICATIONS

Module Specifications

Supply Voltage	11 - 16 Volts DC
Number of Outputs	2
Output Type	Momentary
Output Connections	Output On: White output wire is connected to supply voltage. Output Off: White output wire is grounded.
Max Current	5 Amps
Control Switch on Module	Yes
Compatible Remote	SMART3™ Remote*

**External box switches are used to pair SMART3™ remote to control box. Internal access is not required.*


Available Applications

Conveyors	Stops/starts conveyors in applications where pre-existing controls require a momentary 12V "on" signal to start conveyor and a subsequent momentary 12V "off" signal to stop the conveyor.
Proportional Valves	One module can control one door and one circuit of lights, or two doors.
Auger Hydraulics	Allows for momentary control of electric-over-hydraulic auger positioning cylinders.


Control Module Options

Module P/N	Decal Button Description
1126895	EXTEND/RETRACT
1126896	LEFT/RIGHT
1126897	OPEN/CLOSE
1126898	UP/DOWN



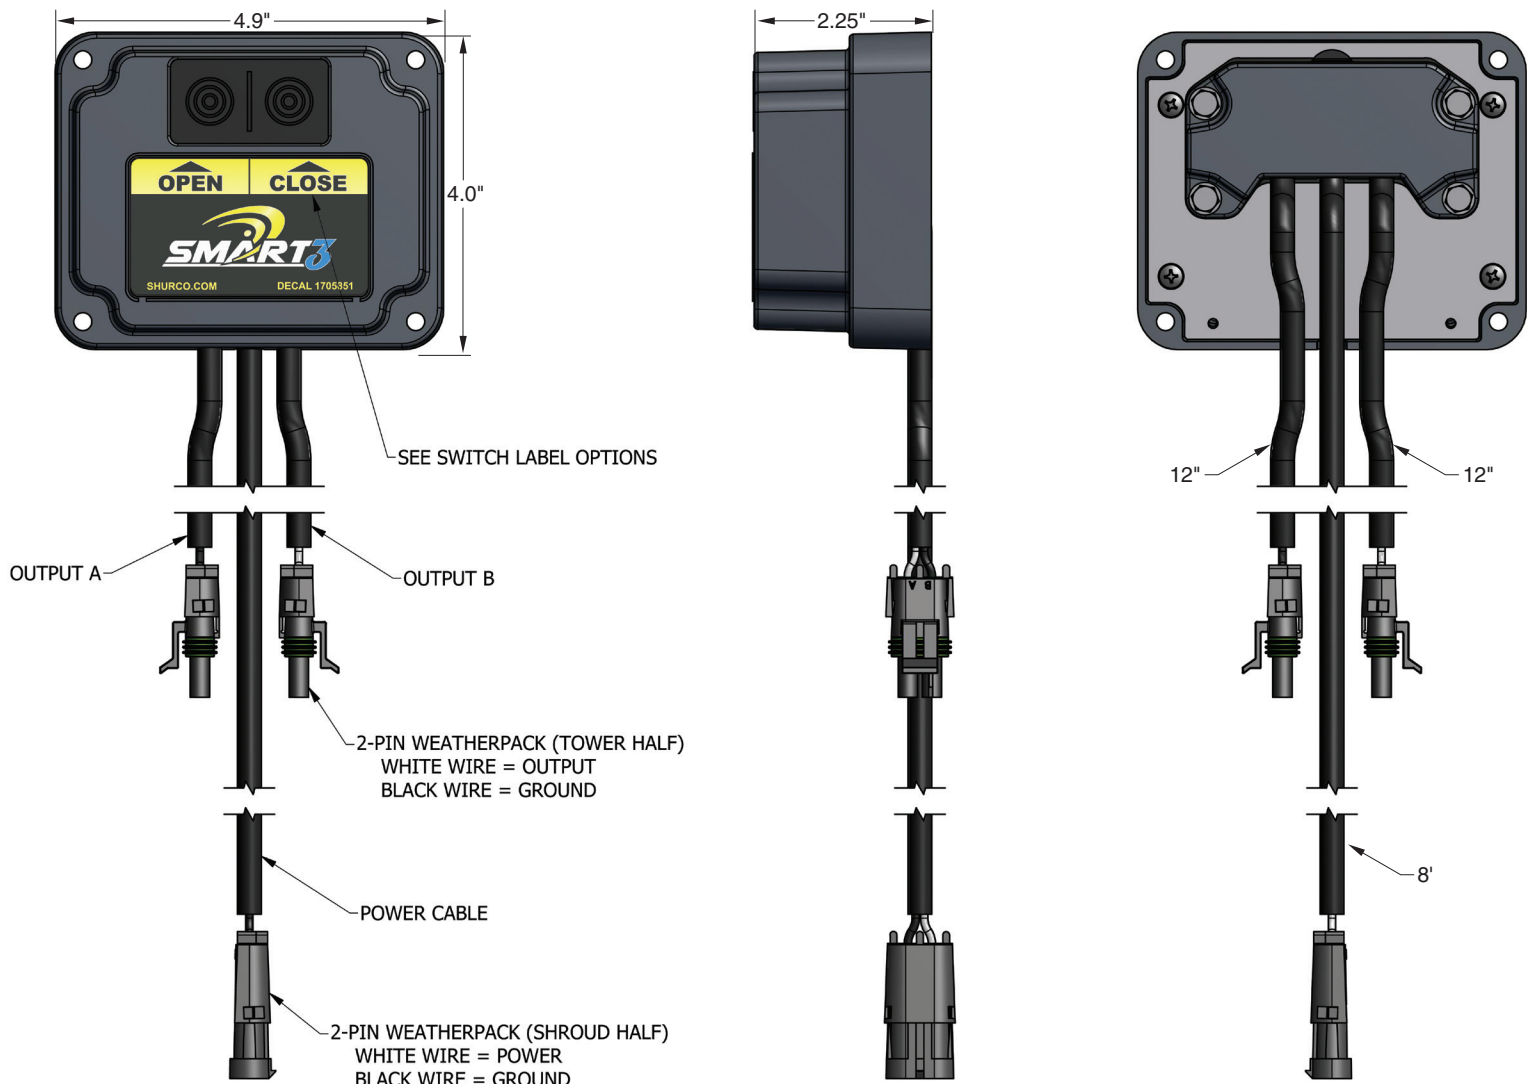


Mounting Options

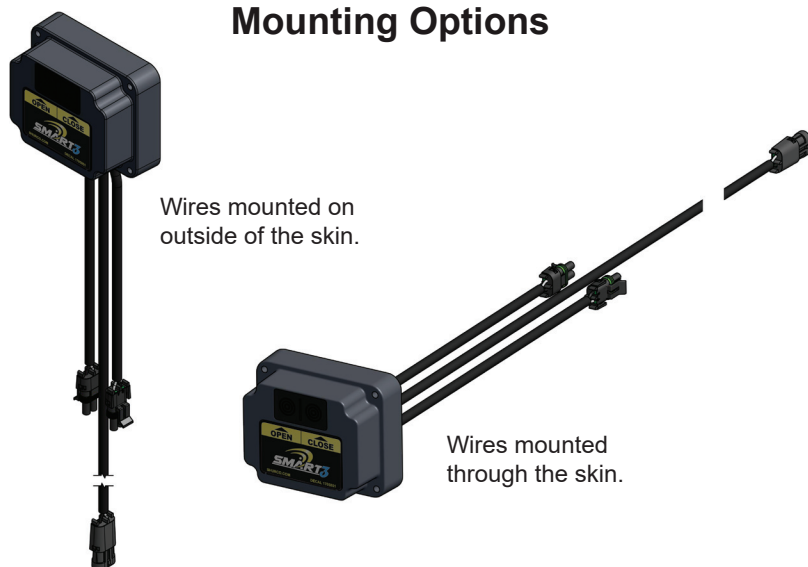

Not to Scale.

1122690 - SMARTWIRE POWER CABLE ADAPTER FOR MINI MODULES

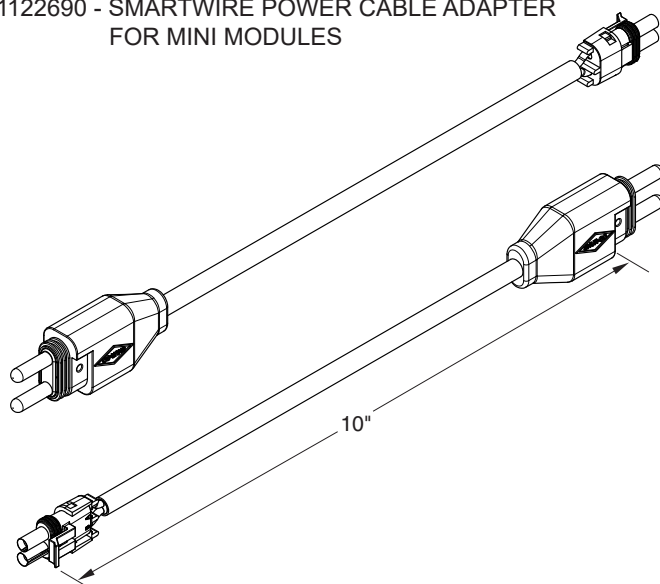

Not to Scale.