



Shur-Co® SMART3™

Wireless Control *Latching Module*

TS005FL - 1018

TECHNICAL SPECIFICATIONS

Module Specifications

Supply Voltage	11 - 16 Volts DC
Number of Outputs	2
Output Type	Latching
Output Connections	Output On: White output wire is connected to supply voltage. Output Off: White output wire is grounded.
Max Current	5 Amps
Control Switch on Module	Yes
Compatible Remote	SMART3™ Remote*

**External box switches are used to pair SMART3™ remote to control box. Internal access is not required.*


Available Applications

Work Lights	Install up to four Shur-Co® LED work lights.
Conveyors	While output remains on, module supplies 12V to customer-specified conveyor control solenoids.
Tag Axle Control	Can supply a 12V continuous signal to operate customer specified electric-over-pneumatic solenoids.
Pump Motor Control	Can supply a 12V continuous signal to customer-specified pump motors, or pump control solenoids.


Control Module Options

Module P/N	Decal Button Description
1126893	ON/OFF - ON/OFF



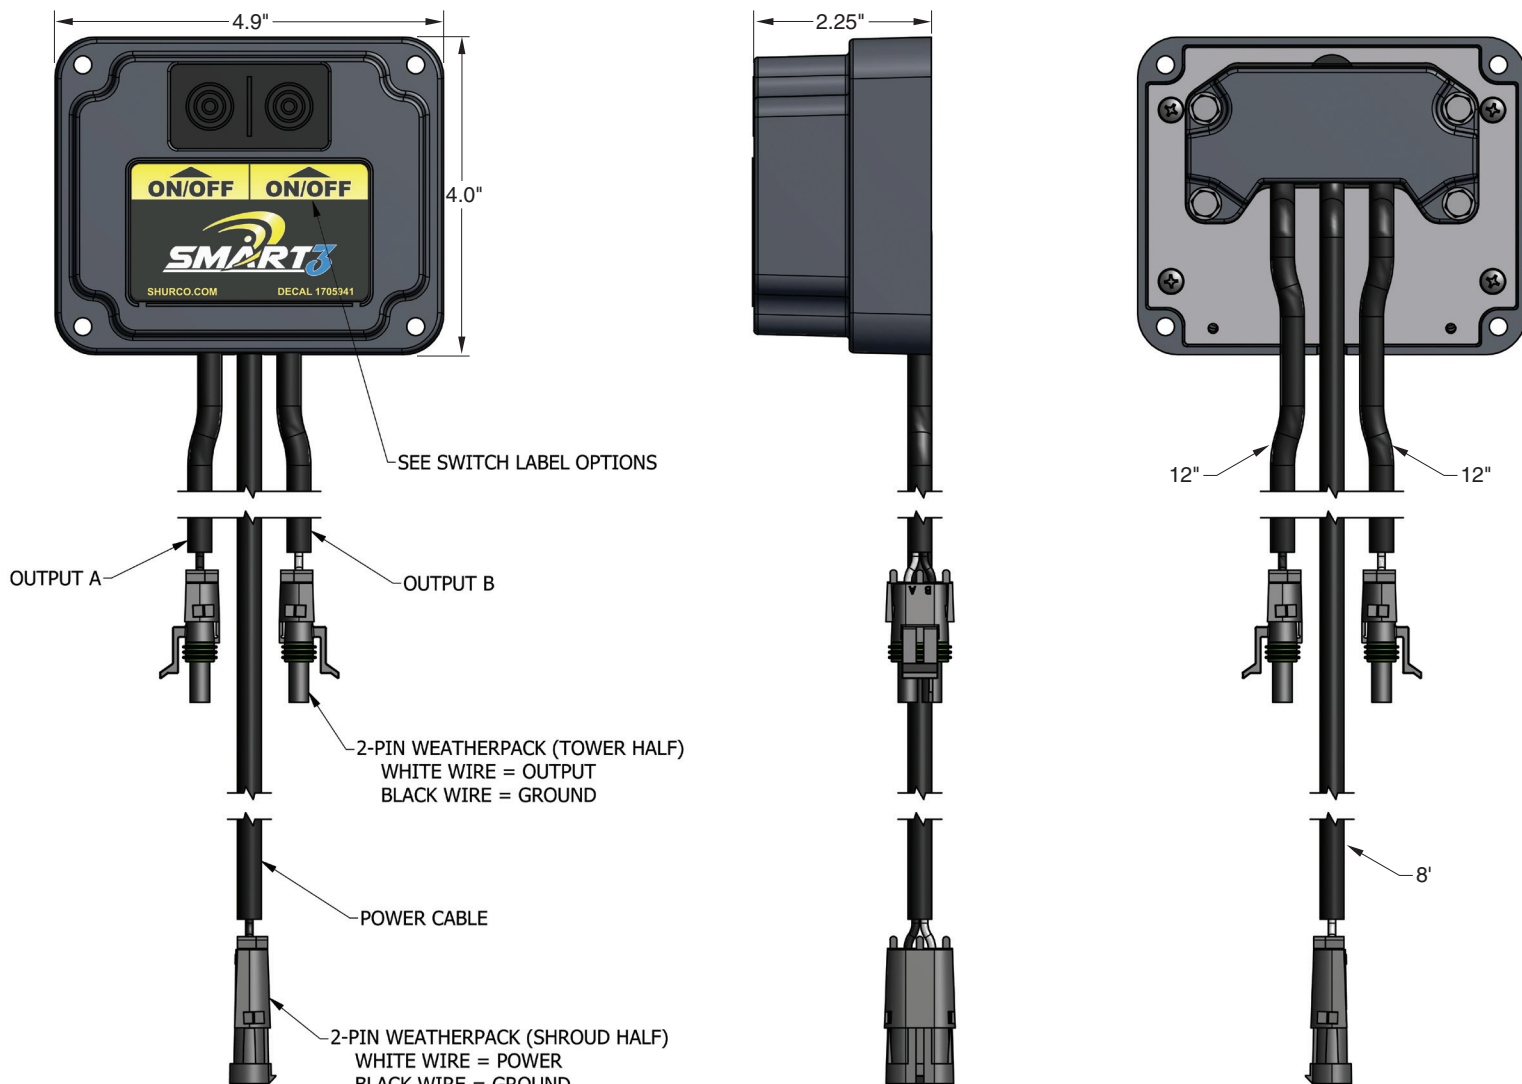


Mounting Options

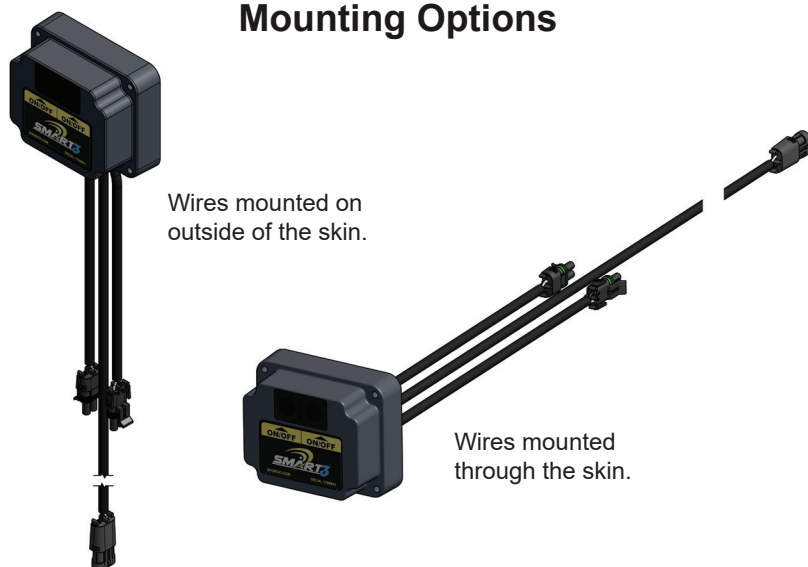

Not to Scale.

1122690 - SMARTWIRE POWER CABLE ADAPTER FOR MINI MODULES

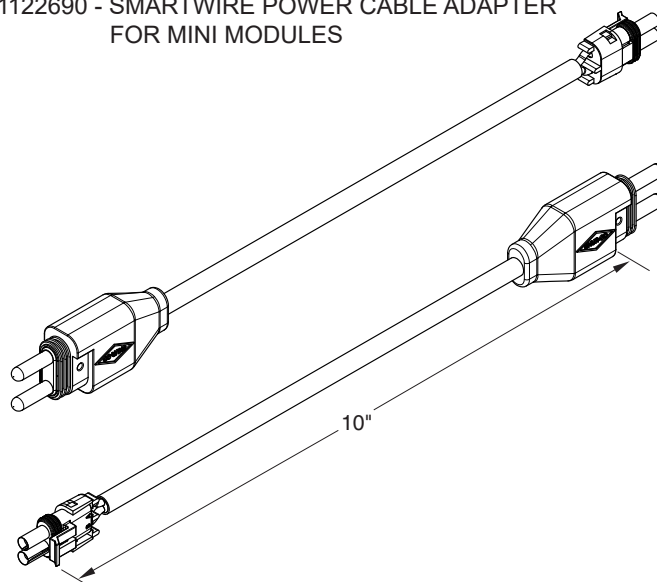

Not to Scale.