



Express Tarp Systems


S1+, S2, S3

Conversion to ShurLink™

INSTALLATION INSTRUCTIONS



Download the ShurLink™ App

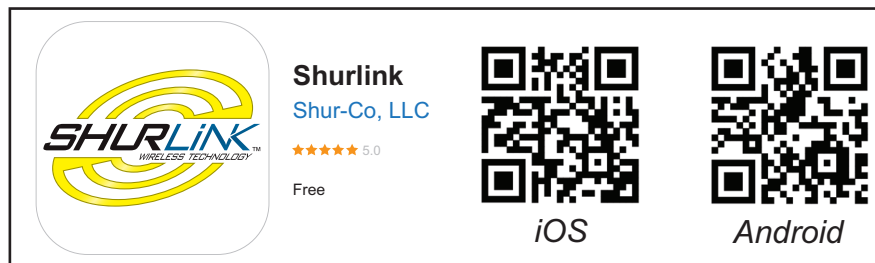

PHONE: 1.866.748.7435 | FAX: 1.605.665.0501

2309 SHURLOCK STREET | YANKTON, SD 57078-0713

SHURCO.COM

**SAFETY INSTRUCTIONS**

At Shurco, your safety is our top priority. Please read and thoroughly understand all instructions before operating all equipment. Failure to READ AND FOLLOW INSTRUCTIONS may result in system failure, property damage, or personal injury. Pay close attention to warnings, cautions, and operating instructions. The hazard symbol  alerts users of potentially hazardous conditions, and is followed by Caution, Warning, or Danger messages to indicate risk:


- **Danger**: (red) Indicates an imminently hazardous situation that, if not avoided, **WILL** result in death or serious injury.
- **Warning**: (orange) Indicates a potentially hazardous situation that, if not avoided, **COULD** result in death or serious injury.
- **Caution**: (yellow) Indicates a potentially hazardous situation that, if not avoided, **MAY** result in minor or moderate injury, or damage to the system.
- **Notice**: (blue) Indicates operational notes or other essential information without addressing safety.

Regularly inspect equipment to ensure proper performance. Always repair or replace worn or damaged parts immediately to maintain safety. Safety decals are placed at critical locations on equipment. Keep these decals clean and legible at all times. Replace any decal that is worn, damaged, painted over or otherwise unreadable. Replacement decals can be obtained by your local Shurco dealer.


- Always wear safety glasses during installation and operation.
- Stay clear of moving parts.
- No other use of Shurco equipment is authorized, except as designed.

SHUR-CO, LLC TERMS OF SERVICE**ORDER
TERMS AND CONDITIONS****WARRANTY****PATENTS****QUESTIONS?**

CALL OUR HELP LINE:

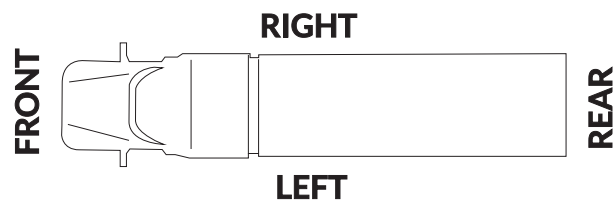1-866-748-7435MONDAY-FRIDAY
8 AM-5 PM CENTRAL TIME**VEHICLE ORIENTATION**

Item	Part #	Description
1.	1131605	Solenoid Cover - ShurLink™ - Tarp - Exp
	1133257	Solenoid Cover - ShurLink™ - IronSide 2/TatorTop - Exp
2.	1704309	Gasket - Solenoid Cover - 1/8"
3.	1705428	Wire - 18 Ga. - .25" Ring x F-QDisc - 90mm - Blk
4.	1707302	Decal - 1705408 - 1/2" x 2"
5.	1704627	Decal - Warning - Motorized System - 4" x 2"
6.	1707865	Decal - Express Mode Notice

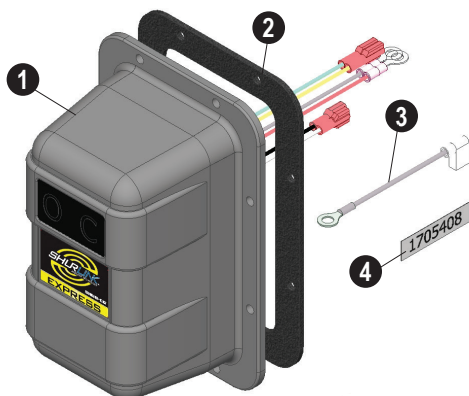

NOTICE

This tarp system may operate in express mode. If enabled, pressing the OPEN/CLOSE button will move the tarp to its end stops. To stop the motor mid-cycle, press either button again.

Refer to the Owner's Manual before operating. For questions, contact Shur-Co® at 1-800-474-8756

Decal P/N 1707865



WARNING




Do not operate motorized systems while individuals are on, in, or near the equipment. Failure to comply may result in serious injury or death.

Disconnect power when accessing or servicing equipment.


Decal P/N 1704627

STEP 1: Disconnect power to receiver. Unfasten and remove existing solenoid cover from receiver bracket.


STEP 2: Remove existing gasket. Clean all dirt and debris from receiver bracket.

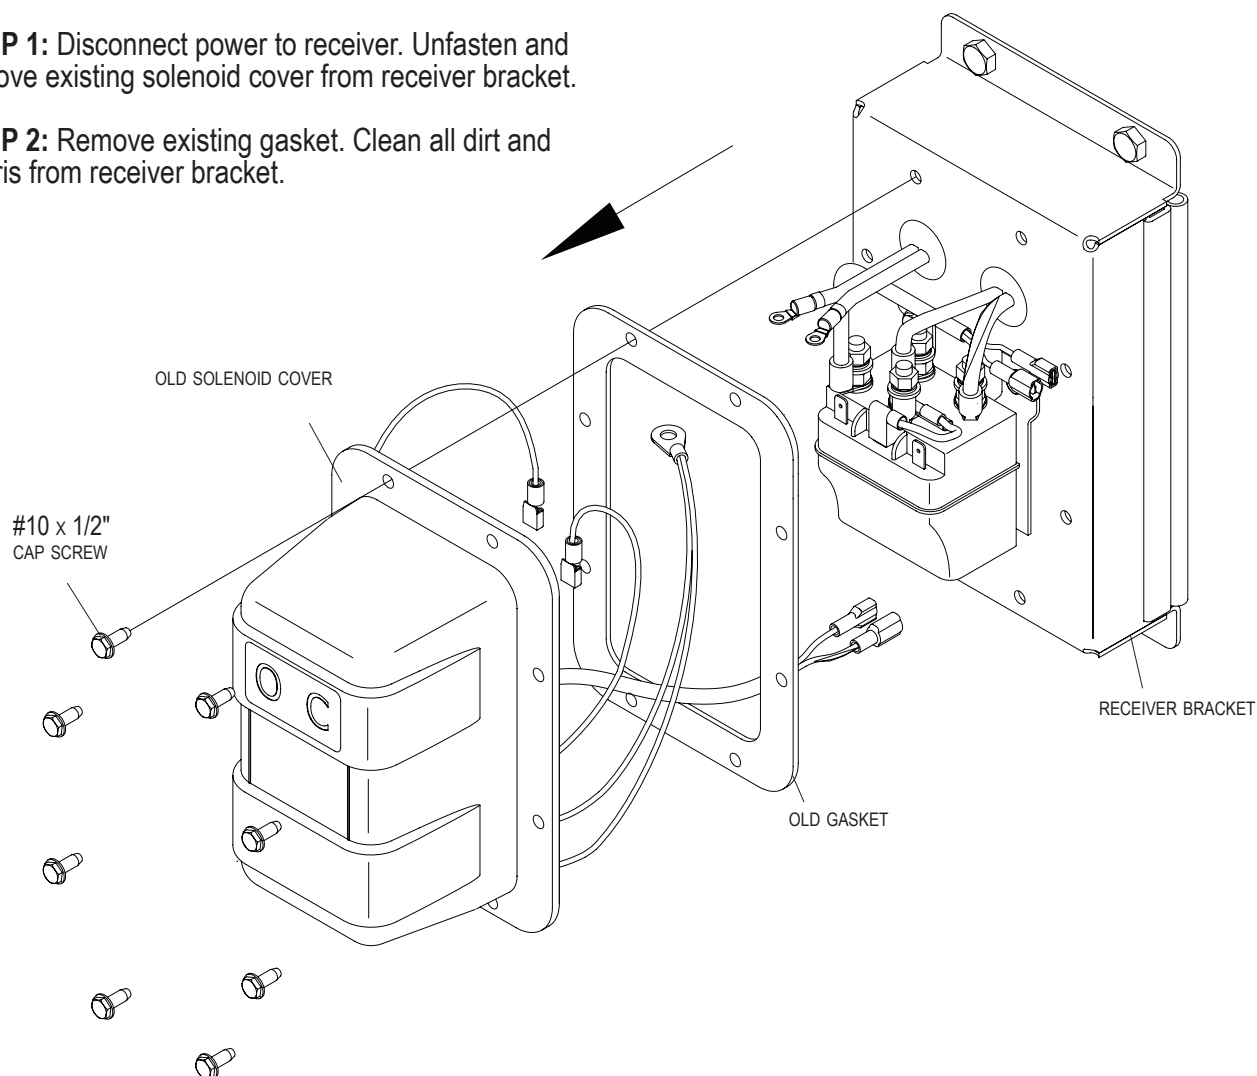

STEP 3: Rewire solenoid as shown:

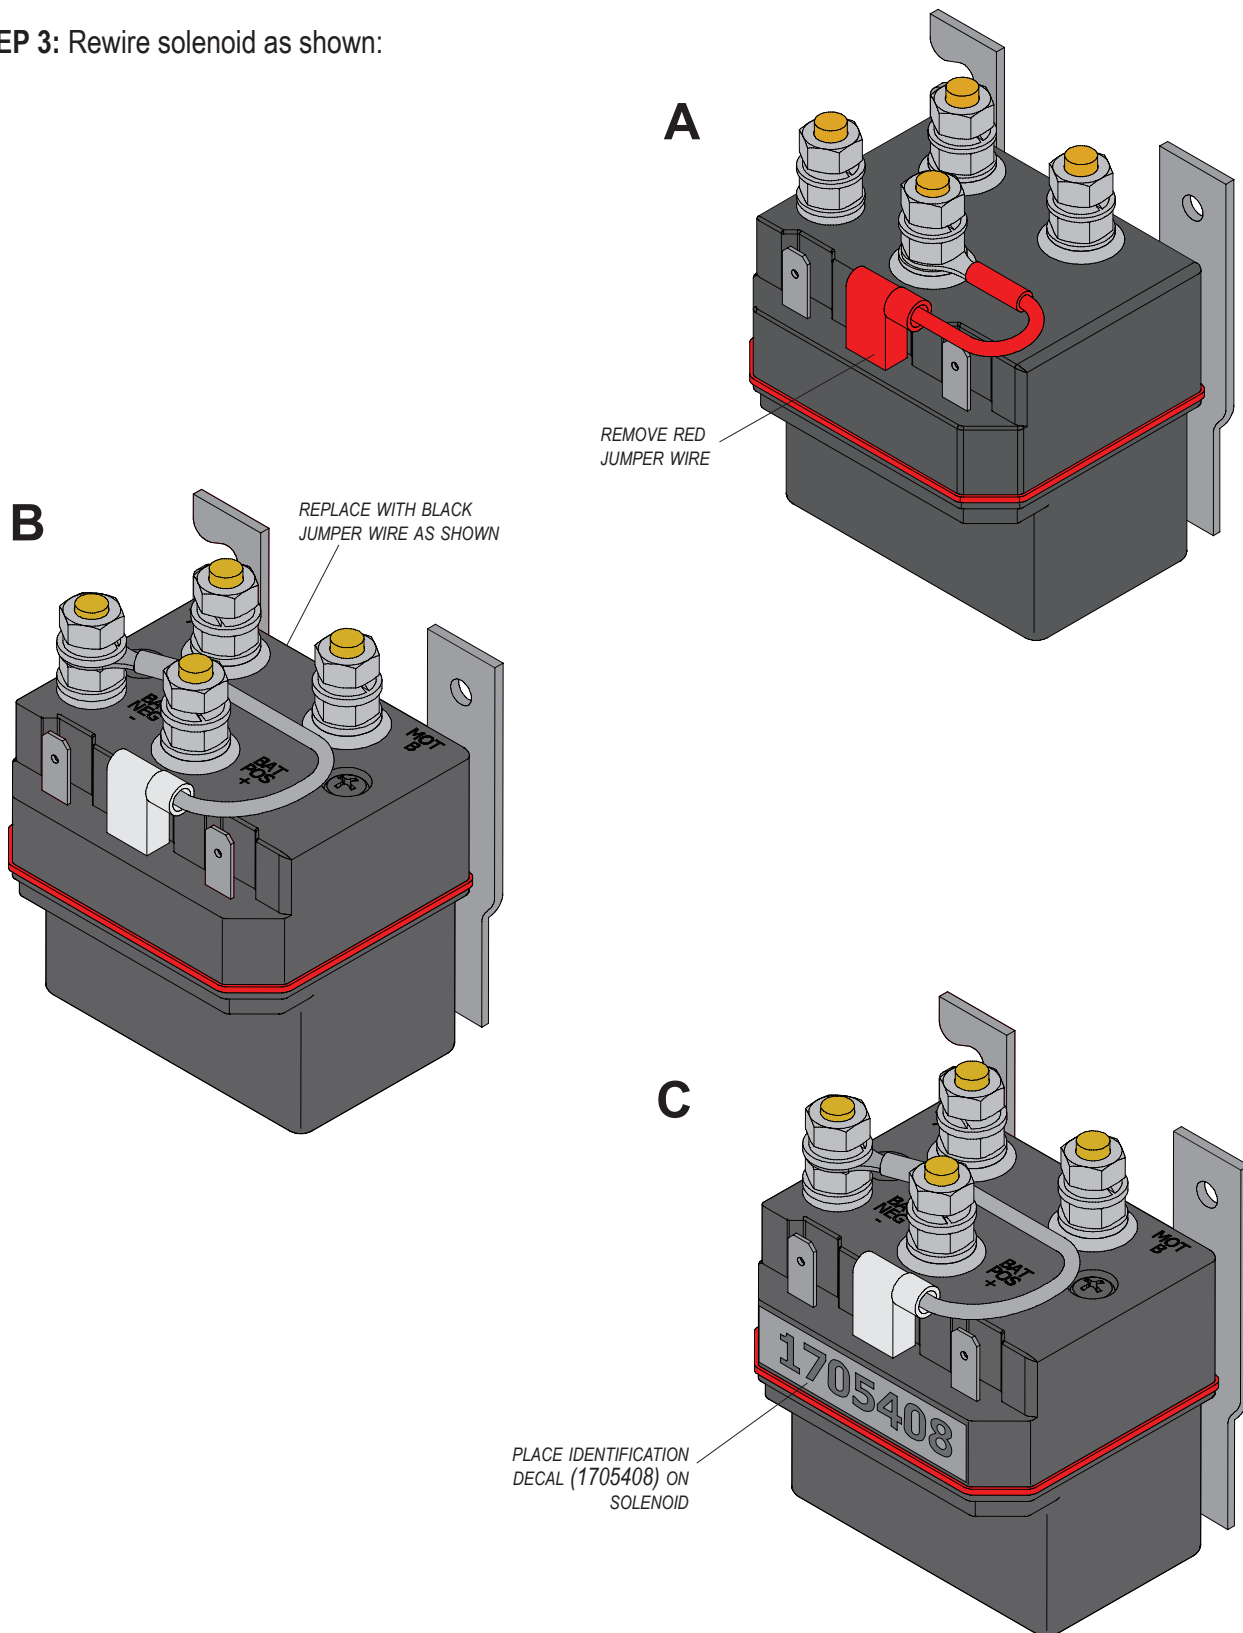


STEP 4: Connect wires from new ShurLink cover to solenoid as shown below. Attach wires in same way as old wires were connected.

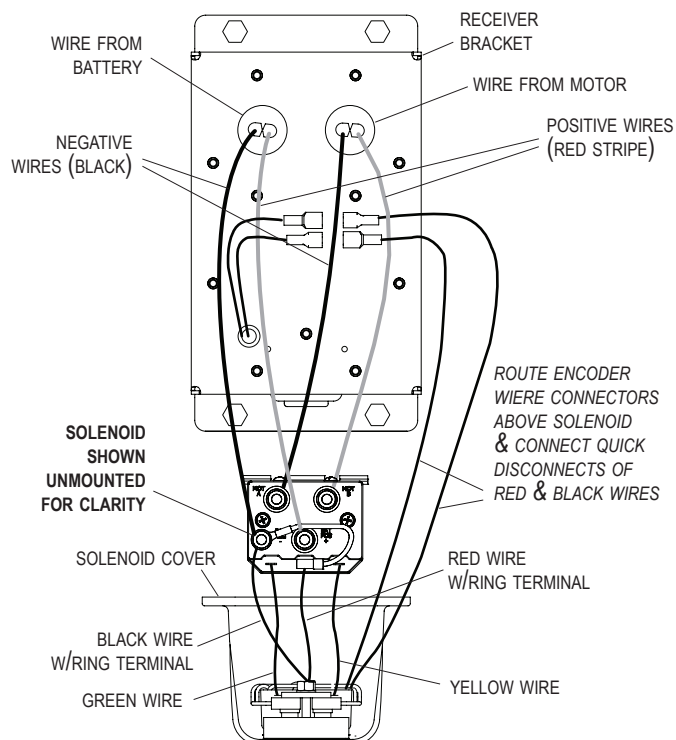

STEP 5: Reconnect power to receiver. Pair (introduce) EZR™ or PRO™ remote to receiver as shown in remote instructions (P/N 1131576 or 1131575) and verify operation.

STEP 6: Replace solenoid cover and secure with #10 x 1/2 inch cap screws.

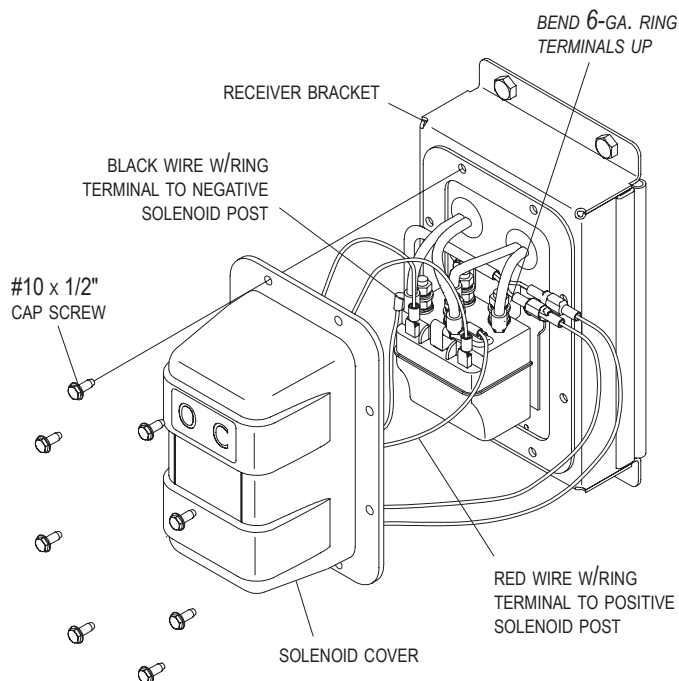

2309 SHURLOCK STREET | YANKTON, SD 57078-0713
PHONE: 1.866.748.7435 | FAX: 1.605.665.0501
SHURCO.com
