
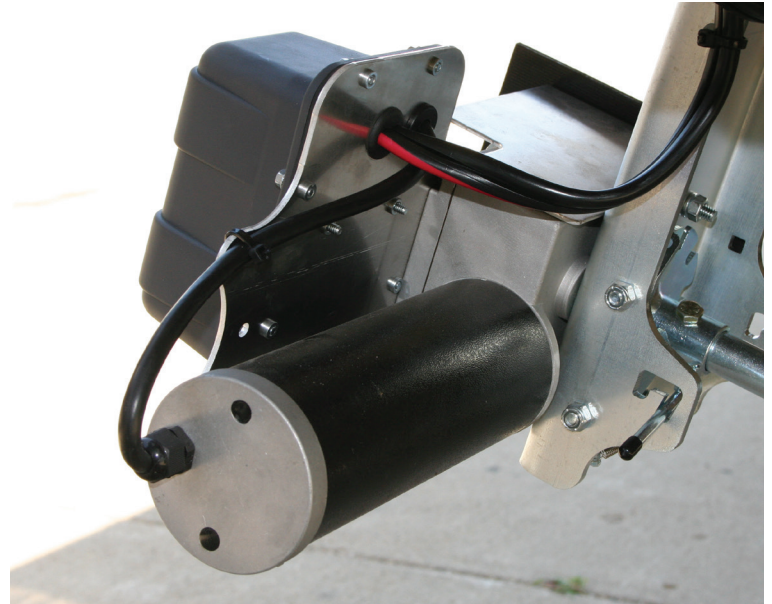


AUTOTRAP™: ELECTRIC HOPPER OPENER

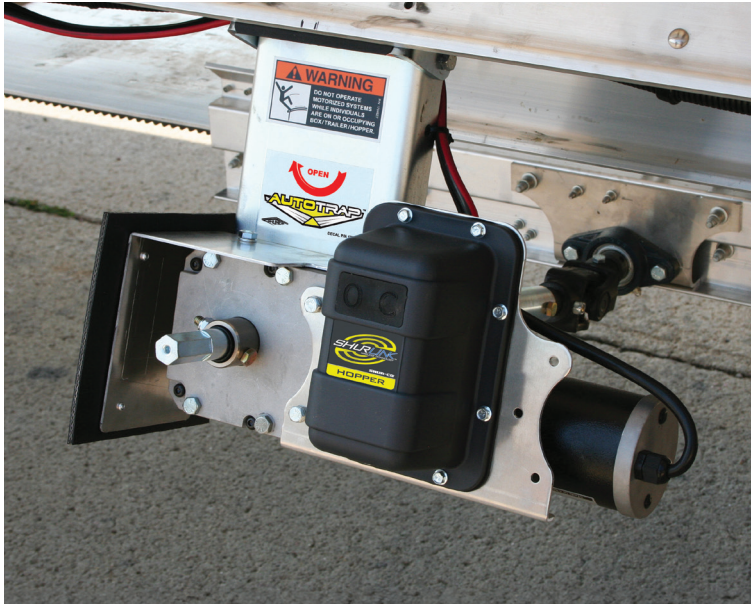

- All-Metal Gear Motor
- Through-Bore Motor
- Protective Polymer Motor Sleeve
- Through-Bore Manual Drive Shaft with 3/4" Hex Milled End
- Universal Mounting Bracket
- Crank Shaft Adapter Kit
- SMARTwire™ Sealed Harness Connection
- ShurLink PRO™ and ShurLink EZR™ Remote System Capabilities, Available Upon Request

The AutoTrap™ is nearly 40% lighter than the ProTrap®. Its design allows easy one-bolt conversion to manual operation, with a polymer sleeve to prevent corrosion. The design interfaces with 1", 7/8", or 3/4" crank shafts. Available in 1-4 hopper stand-alone configurations or in combination with the 4500 Series HD electric tarps.

AUTOTRAP™ HOPPER USAGE:

FARM TO MARKET USE	✓	Fractured Rock	Unadvised	Moderate to Heavy	Material Based
COMMERCIAL/CO-OP USE	Unadvised	Concrete Construction Waste		HOPPER DOOR SIZE	
HAULING COMMODITY GRAIN		Fly Ash		Standard - Up to 1,200 Sq. In.	✓
Corn, Wheat, Soybeans, Rice	✓	Fertilizer	Occasional Use	Oversized - Over 1,200 Sq. In.	Material Based
HAULING HIGH-DENSITY MATERIALS		HEAPED LOADS		HIGHER GROUND CLEARANCE	✓
Smooth River Rock	Occasional Use	Light to Moderate	✓	COMPACT/LIGHTWEIGHT	✓



SUPPORT

Find help with various support pages, including patents, warranties and legal information.



AUTOTRAP™

Want to learn more? Simply scan to explore further details about the AutoTrap™.