


SHUR-CO®



**WASTE WARRIOR™
SINGLE & DUAL STAGE GANTRY**

Operational Guide

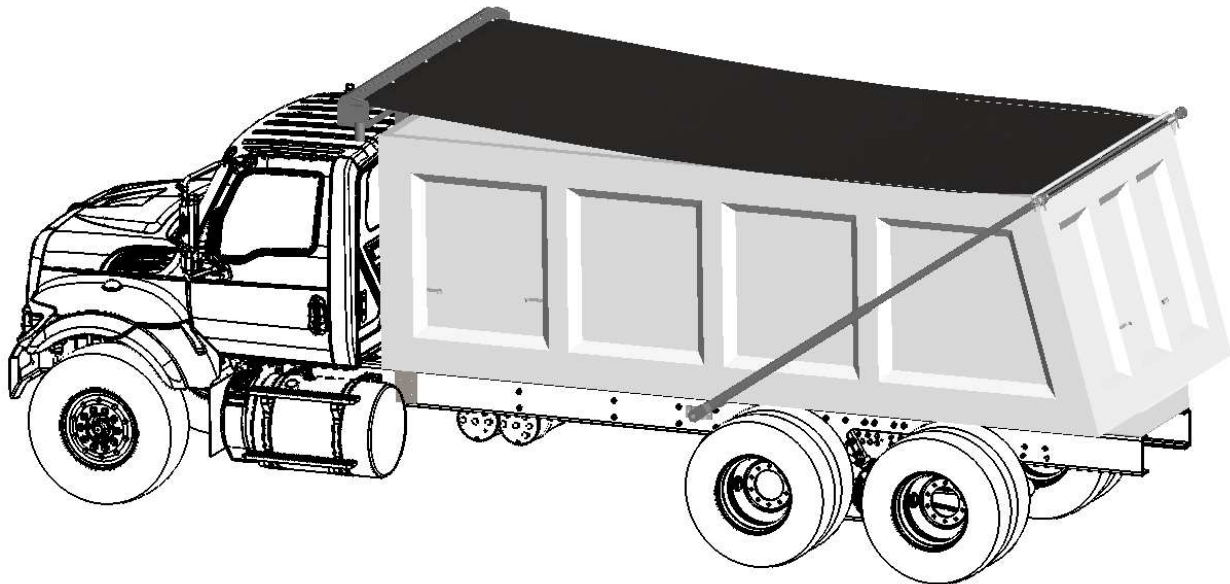

1425 KALAMAZOO STREET | SOUTH HAVEN, MI 49090


PHONE: 1.800.249.0297





SAFETY

Read this section carefully before proceeding. The following symbols may appear prior to certain safety related assembly and installation steps described in this manual.

FAILURE TO OPERATE AND INSTALL THIS UNIT AS INSTRUCTED MAY RESULT IN SERIOUS INJURY OR DEATH.

 DANGER
Indicates an immediately hazardous situation which, if not avoided, will result in serious injury or death.

 WARNING
Indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.


 CAUTION
Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury or property damage.

NOTICE
Indicates information about a subject that is not safety related.

Deploying Tarp System

DONE ONCE THE CONTAINER HAS BEEN LOADED AND SECURED

NOTE: Operation can be done with the control box or the optional wireless remote. Control box operation is shown here. Callouts reference *Figure 1*.

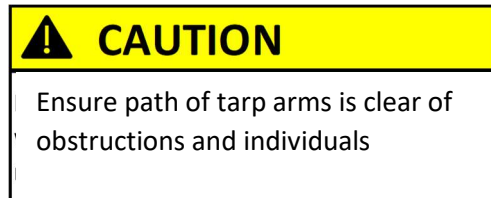

- 1) Turn on LED work lights using the **LED WORK LIGHT SWITCH**, if necessary;
- 2) Operate tarp arms out 2-3 feet by pressing the **MASTER ON SWITCH** and **TARP SWITCH** at the same time;
- 3) Operate gantry frame up until fully extended by pressing the **MASTER ON SWITCH** and **GANTRY SWITCH** at the same time;
- 4) Operate tarp arms out by pressing the **MASTER ON SWITCH** and **TARP SWITCH** at the same time until cross tube sets on rear of container;
- 5) Operate gantry frame down until fully retracted by pressing the **MASTER ON SWITCH** and **GANTRY SWITCH** at the same time;
- 6) Adjust tarp in or out by pressing the **MASTER ON SWITCH** and **TARP SWITCH** at the same time, if necessary
- 7) Turn off LED work lights using the **LED WORK LIGHT SWITCH**;
- 8) Bungee or strap tarp arms if desired or inclement weather conditions are present

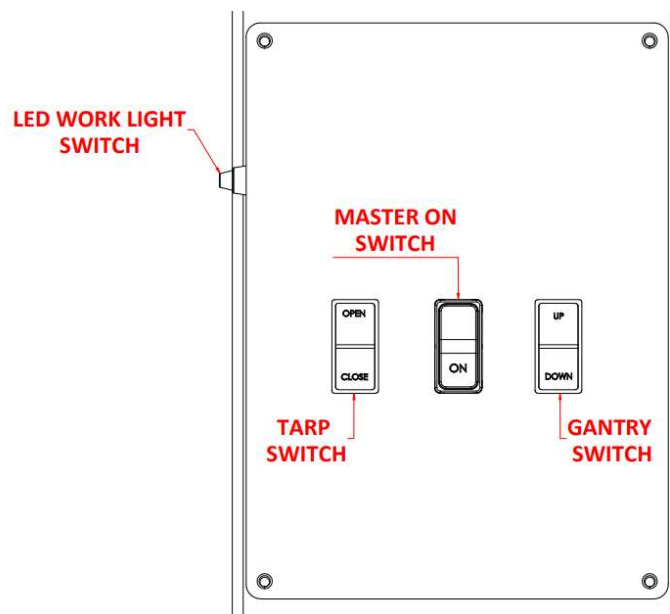


FIGURE 1: GANTRY CONTROL BOX



technicalsupport@ustarp.com
www.SHURCO.com
(800)249-0297

Retracting Tarp System

DONE PRIOR TO UNLOADING THE CONTAINER

NOTE: Operation can be done with the control box or the optional wireless remote. Callouts reference *Figure 2*.

⚠ CAUTION

Ensure path of tarp arms is clear of obstructions and individuals

- 1) Remove all bungees or straps, if applicable;
- 2) Turn on LED work lights using the **LED WORK LIGHT SWITCH**; if necessary;
- 3) Operate gantry frame up until fully extended by pressing the **MASTER ON SWITCH** and **GANTRY SWITCH** at the same time;
- 4) Operate tarp arms in until they are 2-3 feet from housing by pressing the **MASTER ON SWITCH** and **TARP SWITCH** at the same time;
- 5) Operate gantry frame down until fully retracted by pressing the **MASTER ON SWITCH** and **GANTRY SWITCH** at the same time;
- 6) Operate tarp the rest of the way in by pressing the **MASTER ON SWITCH** and **TARP SWITCH**;
- 7) Turn off LED work lights using the **LED WORK LIGHT SWITCH**

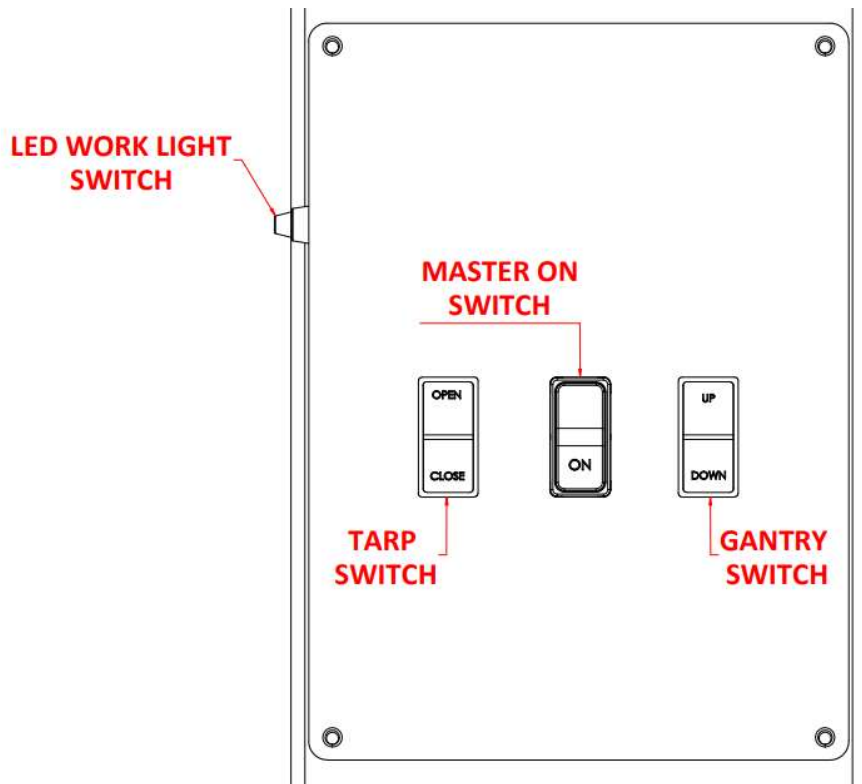


FIGURE 2: GANTRY CONTROL BOX

